


ASSEMBLY INSTRUCTIONS

Tristan 54" Reflector Linear Chandelier

Item # IKF5140

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

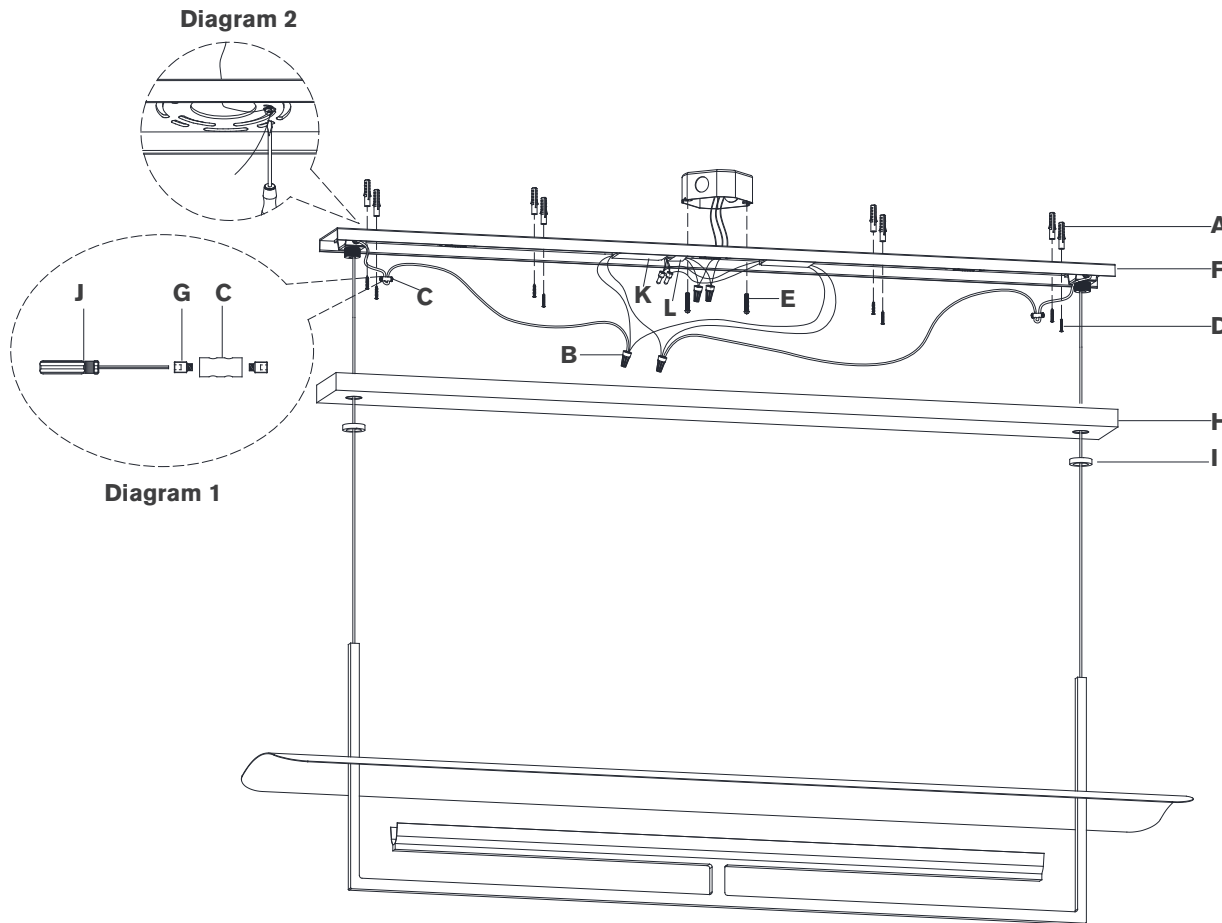

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Wire Strippers	Pencil	Hammer
Drill		

PERSONS REQUIRED: Two

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (F) from canopy (H) by removing collar rings (I).
3. Using mounting plate (F) as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using hammer.
5. Install mounting plate (F) to junction box and secure with mounting screws (E), then secure wood screws (D) to anchors (A).

NOTE: It is recommended to have a helper assist in supporting the fixture for steps 6.

6. Feed hanging cables through collar ring (I) and canopy (H), then through mounting plate bracket on either side.
7. Install cable locks (C) to end of hanging cables. Insert hanging cable through other end of locks and tighten ends (G) using provided screwdriver (J) (see diagram 1).
8. Adjust hanging cables to desired height and level fixture.

NOTE: Double check height and ensure fixture is level before moving to next step.

