

Jeremiah

LIGHTING by Craftmade


Bath Arm Fixture Installation Guide

Guide d'installation de
réglette d'éclairage pour salle de bains

Guía de instalación del listón
de luces para el baño

Jeremiah

LIGHTING by Craftmade

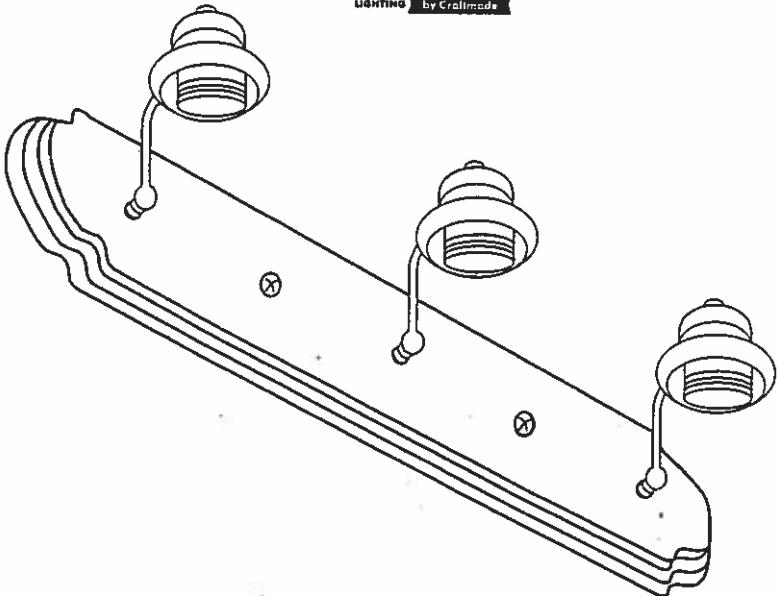

CAUTION

Disconnect Power


Always shut off power at the circuit breaker or disconnect fuse when installing or repairing this, or any other electric appliance.



FAILURE TO
DO SO MAY
RESULT IN
SEVERE
INJURY OR
DEATH.

- Proper wiring is essential for the safe operation of this fixture. Read all instructions before starting. If you are unclear as to how to proceed, consult a qualified electrician before starting.
- All wiring must be done in accordance with national and local electrical codes.
- This fixture is to be mounted to a UL listed outlet box capable of supporting the fixture.
- Caution: Do not pinch wires between cover plate and back plate.

Assembly: Estimated assembly time is 45 minutes.

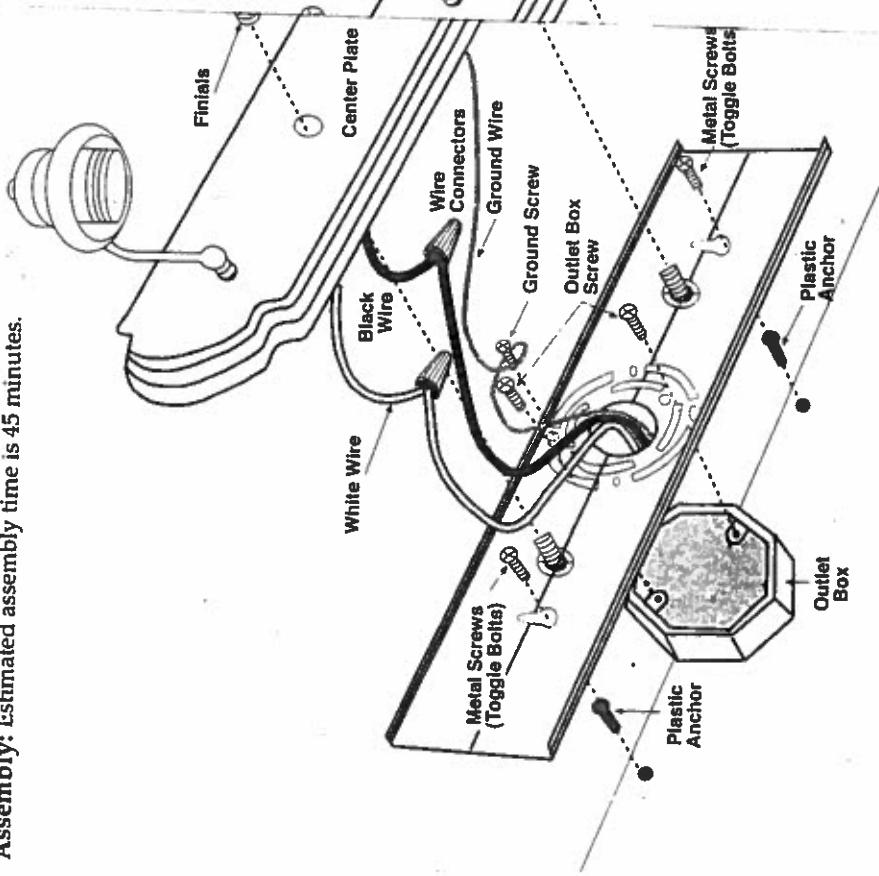

- Separate cover plate from back plate by unscrewing finials from studs. Remove parts bag.
- Hold back plate level to wall, mark wall through 1/4" mounting holes in back plate.
- Drill 1/8" holes in wall and insert plastic anchors.
- Place toggle bolts (if supplied) through mounting holes in back plate and attach toggle wings.
- All supply connections shall be made in outlet box or shall be made inside fixture.
- Bring disconnected power supply wires through large hole in rear of back plate.
- Place back plate against wall. Insert toggle wings (if supplied) with bolts. Insert metal screws through back plate and tighten into plastic anchors and screw holes in outlet box.
- Take black fixture wire and twist together with the black wire from power supply.
- Fit a wire connector over the twisted wires and screw the connector clockwise until firmly secured.
- Connect white wire to white wire from power supply in the same manner. Caution: Do not disconnect the factory wiring harness.
- Carefully push all wire connections back into outlet box.
- Non-insulated wire is a ground wire and must be attached to system ground. Never connect ground wire to black or white power supply wires.
- Remove protective film from cover plate if present.
- Replace cover plate onto back plate with finials and secure.
- Attach glass shades to the fixture by using socket rings or filter screws.
- Install bulbs. Do not exceed the maximum capacity which is recommended on the socket.

ASSEMBLY