




Features

- Excellent color rendering (96+ CRI)
- Color temperatures from 2400K to 4000K
- 100-155 lumens per foot performance
- Consumes only 2.7 watts per foot
- Dimmable with ELV dimmers
- Cuttable every 6.56" (24V) and 3.94" (12V)
- 32.8 ft (24V) / 27 ft (12V) max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life

Available CCT



Control Options

- Trulux Single Color Controls
Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming
Requires Standard Dimmer + Adaptive Driver

Listing / Ratings




TRULUX™ Standard Grade - 24V / 12V

Build an economical and versatile layered lighting system with Trulux Standard Grade tape light. Light output ranging from 140-155 lumens per foot, with easy to work with run lengths up to 32.8 feet, Trulux Standard Grade is perfect for accent lighting applications when soft and subtle lighting is desired.

Technical Information

Series	STL
Input Voltage	24V / 12V (STL-WW-100-12V only)
CCT	2400K / 2700K / 3000K / 4000K
CRI	96+
Wattage	2.7W per ft
Lumens	Up to 155Lm per ft
Max Run	32.8 feet (24V) / 27 feet (12V)
Cuttable	Every 6.56" (24V) / 3.94" (12V)
IP Rating	IP54 (unjacketed) / IP65 (jacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

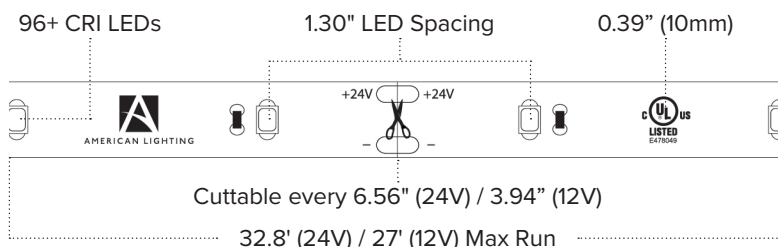



2400K Deluxe Warm White	2700K Ultra Warm White	3000K Warm White	4000K White
2.7W per ft / up to 140Lm per ft	2.7W per ft / up to 146Lm per ft	2.7W per ft / up to 150Lm per ft	2.7W per ft / up to 155Lm per ft
16.4ft & 32.8ft Reels			

STL-UWX (16.4' / 140Lm/ft)	STL-UWW (16.4' / 146Lm/ft)	STL-WW (16.4' / 150Lm/ft)	STL-WH (16.4' / 155Lm/ft)
STL-UWX-33 (32.8' / 140Lm/ft)	STL-UWW-33 (32.8' / 146Lm/ft)	STL-WW-33 (32.8' / 150Lm/ft)	STL-WH-33 (32.8' / 155Lm/ft)

STL65-UWX (16.4' / 100Lm/ft)	STL65-UWW (16.4' / 105Lm/ft)	STL65-WW (16.4' / 115Lm/ft)	STL65-WH (16.4' / 125Lm/ft)
-------------------------------------	-------------------------------------	------------------------------------	------------------------------------

100ft Reels

Unavailable	STL-UWW-100 (100' / 146Lm/ft)	STL-WW-100 (100' / 150Lm/ft)	Unavailable
-------------	--------------------------------------	-------------------------------------	-------------

Unavailable	Unavailable	STL-WW-100-12V (100' / 150Lm/ft)	Unavailable
-------------	-------------	---	-------------

Custom Cut

STL-UWX-CC (140Lm/ft)	STL-UWW-CC (146Lm/ft)	STL-WW-CC (150Lm/ft)	STL-WH-CC (155Lm/ft)
------------------------------	------------------------------	-----------------------------	-----------------------------

STL (IP54) 16.4ft Reels include: Attached 3ft lead wires / (3) TL-CONKIT / (3) TL-BKS
 STL65 (IP65) 16.4ft Reels include: (1) Male (1) Female Connector / (3) TL-CONKIT
 STL (IP54) 100ft Reels include: Attached 3ft lead wires / (5) TL-CONKIT / (5) TL-BKS
 Custom Cut: Please allow up to 2-4 weeks for custom cut order processing and delivery

Building a Single Color Trulux System?

See pages (28-29) for compatible single color Trulux controllers & accessories

Trulux Single Color Accessories

Trulink 4-in-1 Connector Kit TL-CONKIT	Trulink 4-in-1 Connector Block TL-BLKS (Qty 10)	HD Power Feed (IP54) TL-2PWR-HD	HD Splice (IP54) TL-2SPL-HD	HD Linking Cable (IP54) TL-2JUMP6-HD (6") TL-2JUMP24-HD (24")	Linking Cable (IP65) TL-2JUMP65-.5 (6") TL-2JUMP65-1 (12") TL-2JUMP65-2 (24")

Trulux Controller Set-up

	+		+		+	
Push Dial Controller (Single zone)		Adaptive LED Driver (30W / 60W / 96W / 192W / 288W)		Trulux RF Receiver (Required per zone)		Trulux Tape Light

Primary Side Dimming Set-up

	+		+	
Standard Dimmer		Adaptive LED Driver (30W / 60W / 96W / 192W / 288W)		Trulux Tape Light