

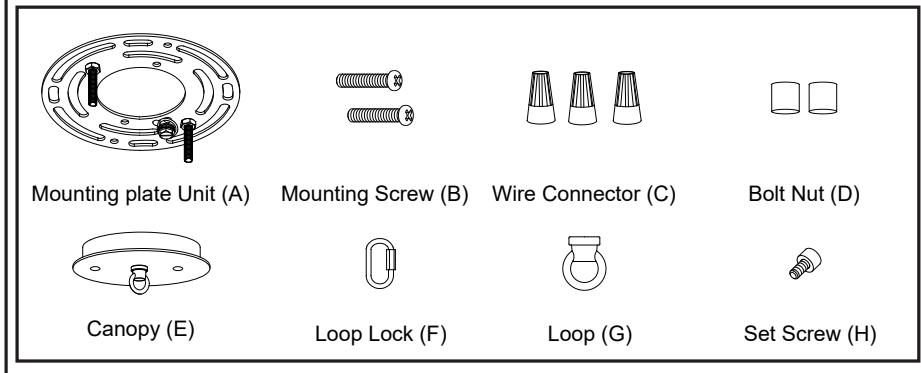
ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0339

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

Hardware Package (included):



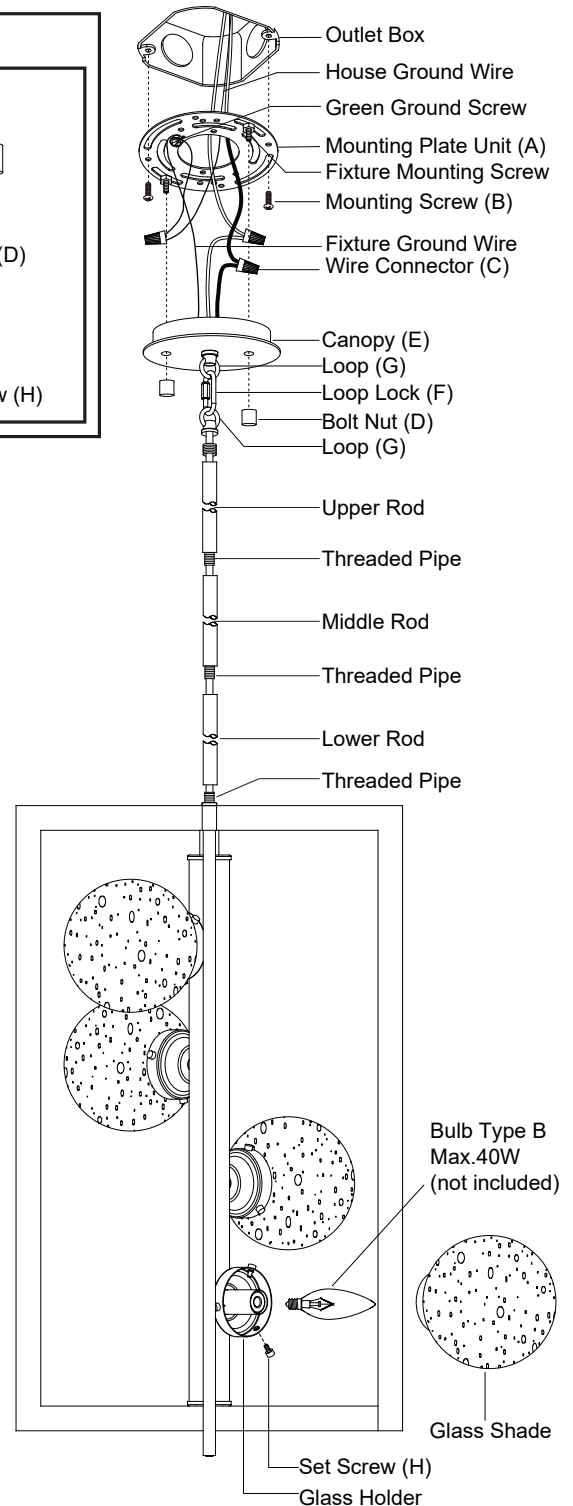
Installation Steps

Turn off the power at fuse or circuit box

- Attach the mounting plate unit (A) to the outlet box by using two mounting screws (B).
- Rod connections:
 - Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto fixture using the threaded pipe.
 - Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
 - Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.
 - Thread the fixture wire through the loop (G) and canopy (E), then secure the loop (G) onto the upper rod using the threaded pipe.

Note: Length adjustable from 34" to 88". Use fewer rods if shorter length is desired.
- Take a loop lock (F), open the locking tube, then hook it onto the loop of canopy (E) and the loop (G) of upper rod. Close back the locking tube of the loop lock (F).
- Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire to the mounting plate unit (A) with the green ground screw, then connect it to the house ground wire with a wire connector (C).

Carefully put the wires back into the outlet box.



6. Attach the glass shades to the glass holders by threading set screws (H). (Do not over tighten)













7. Install 4 x 40W Max. medium base bulbs (not included).

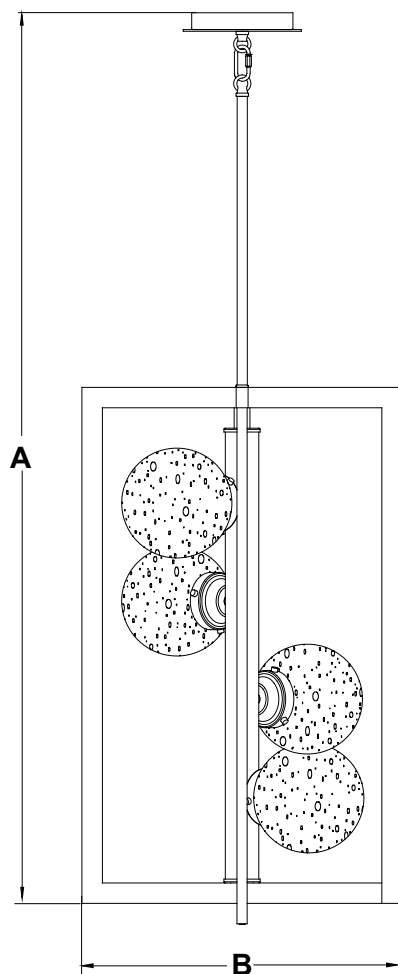
See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

					
Mounting plate Unit (A)	Mounting Screw (B)	Wire Connector (C)	Bolt Nut (D)	12"Rod X1 3256RD	6"Rod X1 3257RD
					
Canopy (E)	Loop Lock (F)	Loop (G)	Set Screw (H)	3"Rod X1 3258RD	
↑ Mounting Hardware 6293MM (1SET)					



A: 34"~88"
B: 16"