


## ASSEMBLY INSTRUCTIONS

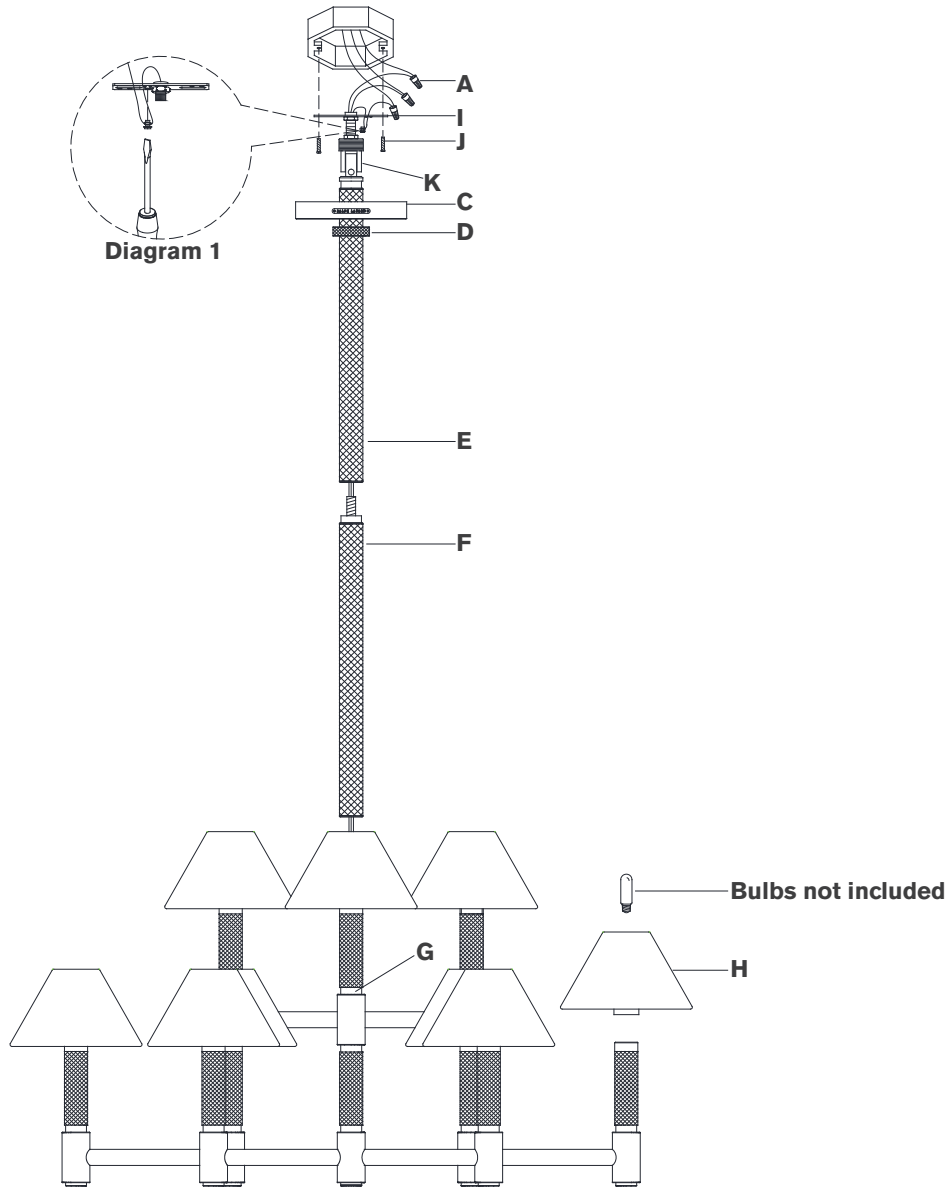

## Barrett Medium Knurled Chandelier

Item # RL 5224

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver      Slotted Screwdriver      Wire Cutters  
Wire Strippers


1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (**C**) from mounting plate (**I**) by removing collar ring (**D**).
3. Feed electrical and ground wires through bottom rod (**F**) and connect to fixture (**G**).
4. Continue feeding wires through collar ring (**D**), canopy (**C**) and top rod (**E**).
5. Holding fixture upright, slide collar ring (**D**) and canopy (**C**) down and rest on fixture (**G**). Then connect top rod (**E**) to bottom rod (**F**).  
**NOTE:** Slide components down slowly to avoid damages.
6. Secure collar loop (**K**) to mounting plate (**I**) using pliers to tighten locknut
7. Install mounting plate (**I**) to junction box and secure with mounting screws (**J**).
8. Cut excess wires, being sure to leave enough to reach the junction box.
9. Separate two sides of molded wire, and strip insulation on each 5/8".
10. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (**A**).

**NOTE:** It is imperative that the fixture is grounded.

# RALPH LAUREN



## ASSEMBLY INSTRUCTIONS

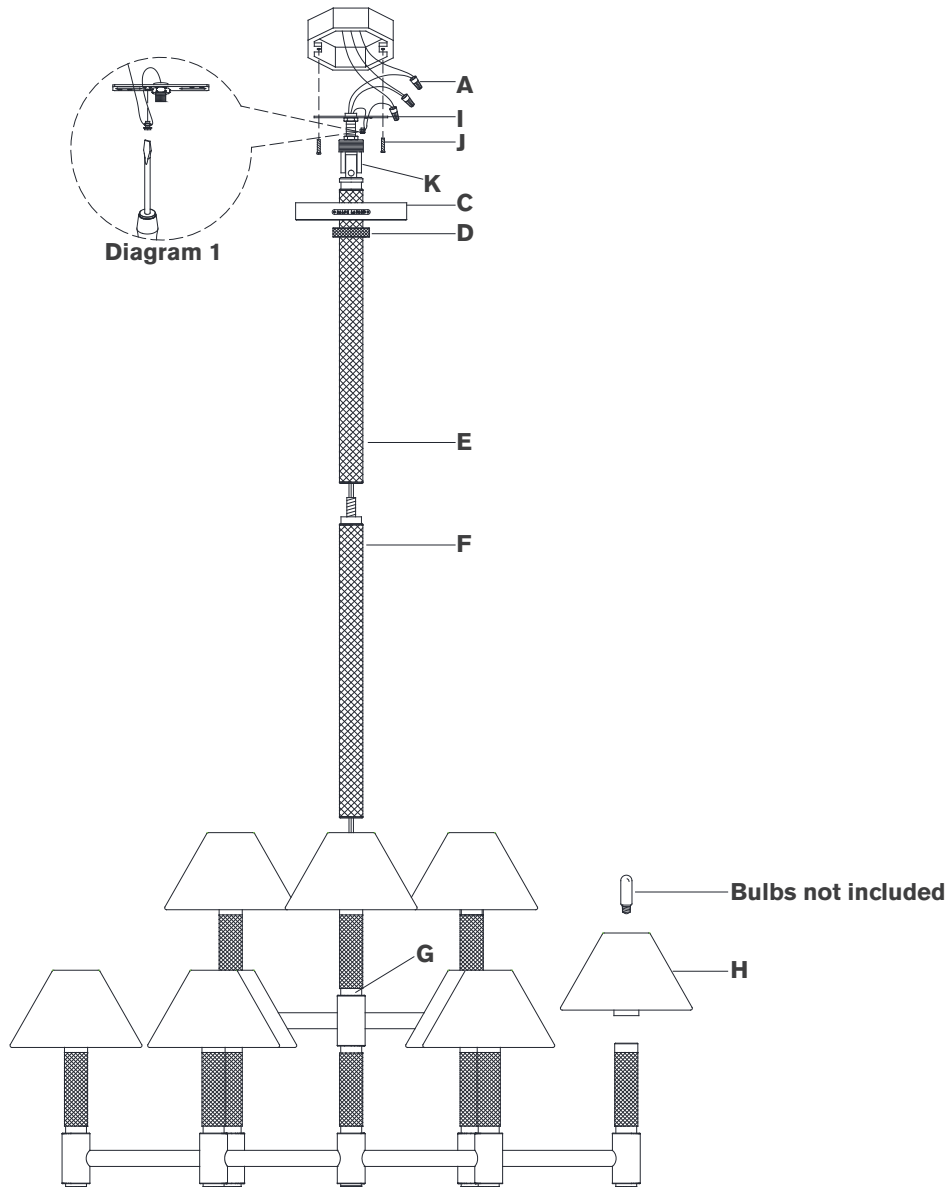

## Barrett Medium Knurled Chandelier

Item # RL 5224

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(A)**.
  12. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.
- CAUTION:** Do not reverse the hot and neutral connections.
13. Make sure all wire connections are tight, then carefully tuck into the junction box.
  14. Install canopy **(C)** to mounting plate **(I)** and with collar ring **(D)**.
  15. Install light bulbs into the sockets.

### SHADE OPTION

16. Place shade **(E)** on socket cap.

**NOTE:** If shade has additional packaging, carefully cut off from interior of shade to avoid damages.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.

# RALPH LAUREN

